

Arabian Fiberglass Insulation Company Ltd.
J.V. of Zamil Industrial & Owens Corning Corp.

Thermacon Duct Liner Board

Technical Data Sheet
Product Code: **DLB**



DESCRIPTION

Thermacon Duct Liner Board is a highly efficient, semi-rigid insulation composed of fine, stable and uniformly textured inorganic glass fibers bonded together by a non-water soluble and fire-retardant thermosetting and heat resistant resin. It is free from coarse fibers and shot due to its mineral composition.

FACING

Thermacon Duct Liner Board is supplied semi-rigid and rigid faced with a strong, dimensionally stable Non-Woven Black Glass Tissue (BGT).

APPLICATION

Thermacon Duct Liner Board is intended for use in commercial, institutional, industrial and residential construction as thermal and acoustical insulation of heating air-conditioning and interior of dual-temperature duct work, air handling equipment and plenums operating at air-velocities up to 30m/s (6000 FPM) and temperatures up to 121°C (250°F).

Also used as an efficient sound absorption treatment of walls and ceilings, acoustic enclosures, generator rooms, studios, curtain walls, auditoriums, conference rooms, theaters and others.

STANDARD AVAILABLE PRODUCTS

Nominal Manufacturing Specifications.
Check for availability of other dimensions and densities.


NOMINAL THERMAL CONDUCTIVITY

W/m.°C-Btu.in./ft².hr°F (ASTM C 518) (BS 874)
"K" or "λ" value at mean temperatures

Product Type DL	Density		Thickness		Width		Length		0°C	32°F	10°C	50°F	24°C	75°F	50°C	122°F	75°C	167°F	100°C	212°F	
	kg/m³	lb/ft³	mm	inch	m	ft	m	ft													
480*	48	3.0	13	½	1.2	4	0.6	2	0.029	0.20	0.030	0.21	0.031	0.22	0.035	0.24	0.037	0.26	0.041	0.29	
			25	1			1	3.3													
			38	1 ½			1	2.4													8
640*	64	4.0	25	1	1.2	4	0.6	2	0.030	0.21	0.031	0.21	0.032	0.22	0.036	0.24	0.038	0.26	0.042	0.29	
			38	1 ½			1	2.4													3.3
			50	2			1	2.4													8
800	80	5.0	25	1	1.2	4	0.6	2	0.030	0.21	0.031	0.21	0.032	0.22	0.036	0.25	0.039	0.27	0.043	0.30	
			38	1 ½			1	2.4													3.3
			50	2			1	2.4													8
960	96	6.0	25	1	1.2	4	0.6	2	0.030	0.21	0.031	0.21	0.032	0.22	0.036	0.25	0.039	0.27	0.043	0.30	
			38	1 ½			1	2.4													3.3
			50	2			1	2.4													8



* Standard Products and Sizes

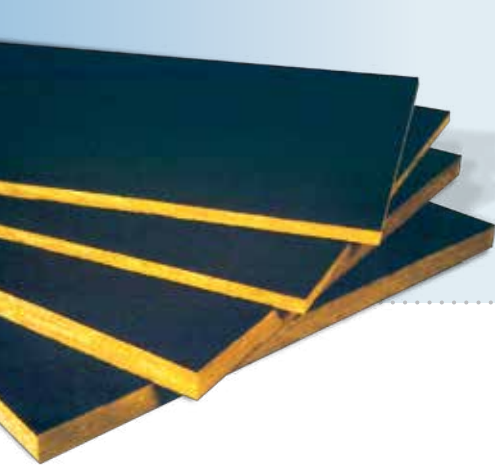

AFICO Duct Liner Board

Technical Data Sheet
Product Code: **DLB**



Performance & Physical Characteristics

Working Temperature Limitations (ASTM C 411)

Operating temperature up to 121°C (250°F) for the BGT faced product. At excessive temperatures, limited migration of binder may occur in the insulation in contact with the surface. This in no way impairs the performance of the insulation.

Thermal Resistance "R" Value (Excluding Facings) (ASTM C 167)

"R" is a measure of the resistance to heat flow of a material of any given thickness. ("R" = m².°C/W or hr. ft².°F/Btu.)

$$R = \frac{T}{K} \quad \text{where "T" = thickness}$$

and "K" or "λ" = thermal conductivity

Corrosiveness (ASTM C 665)

Chemically inert. Will not cause or accelerate corrosion of steel, stainless steel, copper or aluminum, due to its particular inorganic and mineral composition.

Mold Growth (ASTM D 2020) - UL 181

Does not breed or sustain mold, fungus, bacteria or rodents.

Alkalinity

pH 9

Friction Loss

According to TIMA AHS-152T Pressure loss, in W.G., **Thermacon Fiberglass Duct Liner.**

This chart is to be used in place of the standard friction loss chart published in the ASHRAE Handbook of fundamentals.

For conversion of round equivalents to rectangular sizes, use Table C-2 "Circular Equivalents of Rectangular Ducts for Equal Friction and Capacity" from the same reference. Tests conducted in accordance with TIMA AHS 152T.

Surface Burning Characteristics (UL 723, ASTM E 84, ASTM E 136)

Base glass fiber is non-combustible when tested to ASTM E84.

Facing	Flame Spread	Smoke Developed	Fuel Contributed
BGT	25	50	0


Moisture Absorption (ASTM D-07 B) (ASTM C 553)

In conditions of 95% relative humidity at 49°C for 96 hours, moisture absorption is less than 0.2% by volume, when tested in accordance with ASTM C 533. **Thermacon** fiberglass products do not absorb moisture from the ambient air nor water by capillary attraction, only water under pressure can enter the insulation products but that will quickly dry out owing to the material's open cell structure.

Specification Compliance

Thermacon Duct Liner Board complies with the property requirements of the following specifications:

- U.S. Federal Specification HH-I-545 B, TYPE II
- ASTM C 1071 : For Acoustical Performance
- NEPA 90 A : For Fire Resistance
- DCL ASTM - C 533 - C 547 - C 612 - C 665
- CE-EN 13162

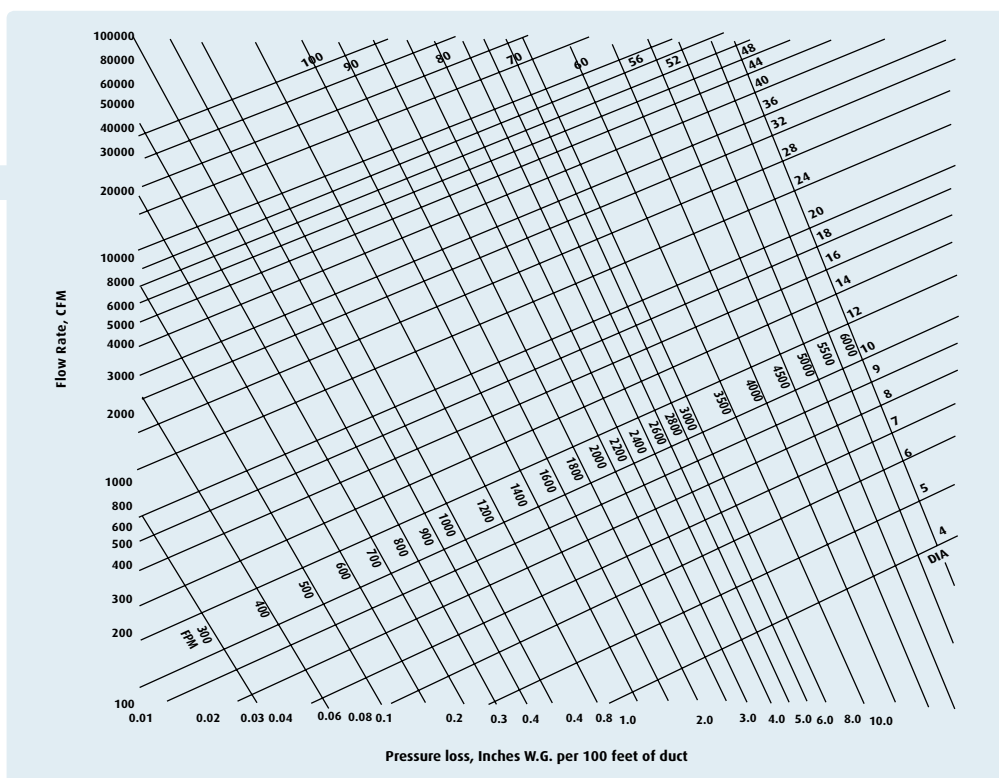



Performance & Physical Characteristics

Acoustical Performance (ASTM C 423-777)

Reverberation Chamber Method
 Sound Absorption Coefficients at Frequencies (Hz)

Type	Thickness		125	250	500	1000	2000	4000	NRC
	mm	inch							
480	13	½	0.18	0.43	0.42	0.52	0.62	0.71	0.50
	25	1	0.34	0.52	0.73	0.96	1.10	1.09	0.85
	38	1 ½	0.25	0.72	1.05	1.04	1.02	1.08	0.95
	50	2	0.31	0.81	1.16	1.09	1.06	1.13	1.05
640	25	1	0.09	0.22	0.63	0.86	0.86	0.96	0.65
	38	1 ½	0.15	0.57	0.95	0.99	0.87	0.93	0.85
	50	2	0.28	0.81	1.04	1.10	1.06	1.09	1.00
800	25	1	0.09	0.30	0.75	0.87	0.92	1.00	0.70
	38	1 ½	0.14	0.65	0.97	0.98	0.81	0.92	0.85
	50	2	0.25	0.74	1.17	1.13	1.06	1.07	1.05
960	25	1	0.06	0.26	0.77	0.96	1.01	1.07	0.75
	38	1 ½	0.22	0.72	1.03	1.07	0.95	1.00	0.95
	50	2	0.48	0.82	1.21	1.10	1.02	1.05	1.05

Thermacon Duct Liner Board should be adhered to sheet metal ducts with 100% coverage of adhesive. (The adhesive shall conform to standard ASC-A 7001C or as approved by the project consultant). In addition, mechanical fasteners should be used according to the following schedule:

For velocities to 10m/s: On horizontal runs where duct width or height exceeds 500 mm, the liner should transverse edges and spaced at a maximum of 375 mm on centers and 375 mm from longitudinal joints. On vertical runs, fasteners should be similarly spaced where either dimension exceeds 300 mm.

For velocities up to 10 to 20 m/s: On horizontal runs where duct width exceeds 300 mm or duct height exceeds 400 mm, the liner should be secured with fasteners starting within 75 mm of the upstream transverse edges and spaced at maximum of 375 mm on centers and 375 mm from longitudinal joints. On vertical runs, fasteners should be similarly spaced where either dimension exceeds 300 mm.

For velocities from 20 to 30 m/s: Same as for 10 to 20 m/s, except that fasteners should be spaced at a maximum of 300 mm on centers and metal nosing should be installed to secure liner at all upstream transverse edges.

Installation Recommendation for Board

Thermacon Duct Liner Board is applied to the interior of ducts and plenums with the black surface facing the air stream. Transverse joints are to be neatly butted, with no interruptions or gaps. Longitudinal corner joints are to be overlapped and tight. Top pieces are to be supported by side pieces.

No. Pins	Liner Interior Width
0	8" dn
2	9" - 16"
3	17" - 28"
4	29" - 40"
5	41" - 52"
6	53" - 64"
7	65" - 76"
8	77" - 88"
9	89" - 100"


When velocity exceeds 4000 FPM use metal nosing on every leading edge. Nosing may be formed on duct or by channel or Zee attach by screws, rivets or welds.


Maximum spacing for fasteners.
 Actual intervals are approximate.

Velocity	Dimensions			
	A	B	C	D
0 - 2500 FPM	3"	12"	4"	18"
2501 - 6000 FPM	3"	6"	4"	16"

The velocity rated side of liner must face the air flow.

Liner adhered to the duct with 90% min. area coverage of adhesive.

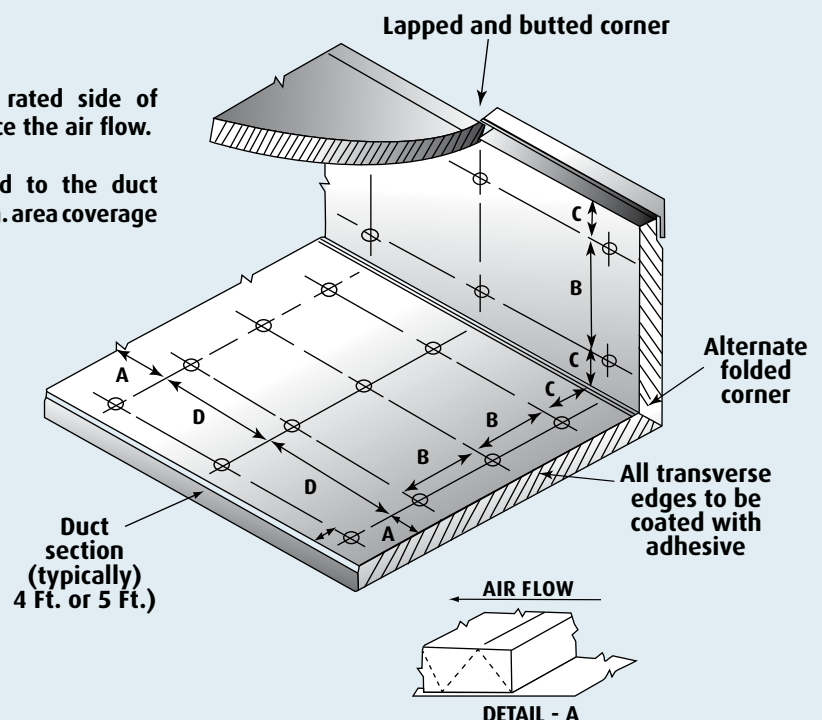



AFICO Duct Liner Board

Technical Data Sheet
Product Code: **DLB**

MAINTENANCE

No maintenance is required. **Thermacon Duct Liner Board** have a high resistance to accidental damage from knocks and handling during installation and maintenance. Dimensionally stable under varying conditions of temperature and humidity, rot-proof, odourless, non-hygroscopic and will not sustain vermin or fungus due to its inorganic and mineral compositions.

The product will maintain its thermal properties throughout the lifetime of the construction and will not age. **Thermacon** fibreglass is non toxic and not hazardous to health.

STORAGE

To avoid moisture in the building construction, **Thermacon** insulation products stored outside must be kept dry. We recommend **Thermacon** products to be always stored in covered and dry areas. **Thermacon** is not liable for the damage resulting from inadequate utilization, loading and off loading and mishandling of its products.

WARRANTY

See manufacturer's General Terms and Conditions of Sale. As **Thermacon** and/or OC has no control over installation design, installation workmanship, accessory materials, or conditions of application, **Thermacon** and/or OC does not warrant the performance or results of any installation containing their products. This warranty disclaimer includes all implied warranties, including the warranties or merchantability and fitness for a particular purpose.

Arabian Fibreglass Insulation Company **Thermacon** reserves the right to alter product specifications without prior notice, as part of its policy of continued development and improvement. The installation methods described in this leaflet are not compulsory. The choice of **Thermacon** materials and methods of fixing are the decision of the specifier, consultant or contractor. For further information or advice on specification of **Thermacon** products, contact your local sales office.

AVAILABILITY

Manufactured by **Arabian Fibreglass Insulation Company, Ltd.** (AFICO), member of **Zamil Industrial**, with headquarters and production facilities located in Dammam, Saudi Arabia, under license from and utilizing the manufacturing specifications and technology of **Owens-Corning Corporation** (OC), Toledo, Ohio, U.S.A.

Marketed throughout Saudi Arabia, the G.C.C. countries, the Middle East and the Far East. **Thermacon** products are available directly from **Thermacon** as well as through a vast and reliable network of local distributors.

Special products are manufactured on request.

Thermacon PRODUCTS

PRODUCTS CODE

Acoustical Ceiling Panels	ACP
Blanket Insulation	BKT
HD Series Blanket Insulation	HDB
Board Insulation	BD
Roof Insulation	RI
Roof Deck Board Insulation	RD
Cavity Wall Insulation	CWI
Pre-engineered Metal Building Insulation	MBI
Faced Duct Wrap	FDW
Duct Liner	DL
Duct Liner Board	DLB
Mechanical Board Insulation	MBD
Heavy Density Pipe Insulation	PI
Pipe Wrap Insulation	PWI
Thermal Insulating Wool	TIW
Quiet Liner	AQL
Woven Facing	AWF
Prefabricated Duct Board	PDB

For more information call the insulation professionals:



H.O. & Factory: P.O. Box 1289, Dammam 31431, Saudi Arabia
Tel: +966 3 847 2901 / 847 1519
Fax: +966 3 847 3605
E-mail: wajdei@afico.com.sa

Riyadh Office: P.O. Box 50281, Riyadh 11523, Saudi Arabia
Tel: +966 1 472 5555 ext. 283
Fax: +966 1 291 0162
E-mail: kathunaiyan@afico.com.sa

Jeddah office: P.O. Box 2140, Jeddah 21451, Saudi Arabia
Tel: +966 2 670 0020 ext. 133
Fax: +966 2 287 2283
E-mail:

Gulf Regional Office: P.O. Box 44493, Deira, Dubai, U.A.E.
Tel: +971 4 294 1211
Fax: +971 4 294 1168
E-mail: aficogcc@emirates.net.ae

Export Office: P.O. Box 90-284, Jdeidet El Metn Beirut – Lebanon
Tel: +961 1 900962
Fax: +961 1 900963
E-mail: AFICO@cyberia.net.lb

 info@afico.com.sa

 www.afico.com.sa



Our GREEN promise:
the healthy solution

- ENERGY SAVING
- ENVIRONMENTALLY FRIENDLY
- RECYCLED MATERIALS
- SOLUTION FOR GLOBAL WARMING



ISO 14001

AFICO is committed to a greener, cleaner environment. AFICO have responded to this call for conservation by increasing the amounts of recycled materials in our products.

Authorized Distributor



16 Hodgson Way
Kewdale WA 6105
T: (08) 9353 6033

thermacon@thermacon.com.au
www.thermacon.com.au